


Instructions compliments of:

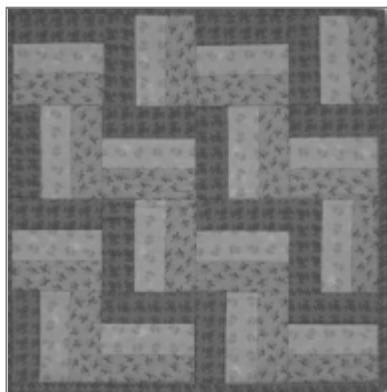

Size approx: 18-1/2"x18-1/2"

## Baby Doll Blanket #3

*Note: A Split Rail block can be made traditionally or scrappy. Our sample and directions are for making a traditional Split Rail block.*

### Fabric Requirements/Cutting Instructions

#### Split Rail Fabrics:

Choose three (3) different fabrics that coordinate but have some contrast in colors and size of the prints all to add interest.

**From each color** you will cut 2" wide strips. If you are using WOF strips (approx. 44"/45") you need a qty of two and a half (2-1/2) strips. If you are using fat quarters (approx. 18"x22") you need five (5) 22" strips.


**Backing:** 1 piece 20"x20"

**Batting:** 1 piece 20"x20"

**Binding:** three (3) 2-1/2" WOF strips.

### Assembly


Sew the three different color strips together using the same order for each strip set.

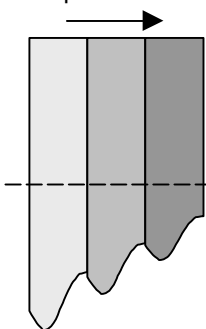


Press the seam allowances all in the same direction. Measure across the strip set and cut the strip set at this length.

*Example, if you are using 2" strips and sewing three strips together, then the strip set should measure 5" across and you will cut your strip sets at 5" lengths.*

Next, the blocks will be sewn together to make a row.

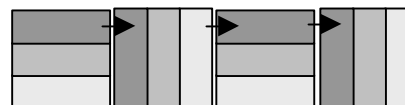

Row 1 & 3

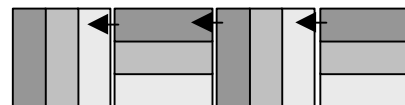

Row 2 & 4

The block sequence for the 1<sup>st</sup> and 3<sup>rd</sup> rows is a horizontal block, then a vertical block, a horizontal and then a vertical block. Make two (2) rows like this one. Press the seam allowances all in the same direction.

The block sequence for the 2<sup>nd</sup> and 4<sup>th</sup> rows is a vertical block, then horizontal, a vertical and then a horizontal block. Make two (2) rows

like this one. Press the seam allowances all in the same direction.

Once the blocks are sewn into rows; the rows can be sewn together. Sew row 1 to row 2, row 2 to row 3 and row 3 to row 4. Watch the design that appears. Press the seam allowances all in the same direction.

There are no borders on this blanket.

### Finishing

Using either a temporary spray adhesive (or traditional basting methods) attach the wrong side of the backing fabric to one side of the batting square. Smooth out. When complete lay batting side up on your work station. Lay your quilt top wrong side down onto batting. Smooth out all three layers.

Quilt as desired. (As a reminder our sample was stitched in the ditch.)

Square up the quilt as close to the 18-1/2"x18-1/2" size as you can.

With your machine, attach the binding to the BACKSIDE of your doll blanket. Bring the binding to the FRONTSIDE and using a decorative topstitch, sew around the blanket. (Reason: if the binding is machine stitched to the blanket it will hold up for many, many washings.)

If you are more comfortable using a traditional binding method - please do so.

WOF = width of fabric - approx. 44/45"  
1/4" seam allowance used throughout the pattern.

#### Silver Lane Quilting, Inc.

Spring Brooke Plaza  
4869 - 208<sup>th</sup> Street North, Suite 104  
Forest Lake, MN 55025  
651-639-8800

***We are proud to be part of your quilting success.***

© 2008 Elaine E. Leko/Silver Lane Quilting, Inc.

No part of this pattern may be reproduced in any manner without written permission from Silver Lane Quilting, Inc.

Photocopying, digitizing and all other reproduction by any means to "share" these instructions is prohibited by US and International Copyright Law.